



Professional makes all different!



苏州利保隆包装机械有限公司

地址：江苏省张家港市乐余双桥工业园区
电话：+86-512-67236151
Whatsapp: +86-13862027738
邮箱：Sales@Labelong.com
网址：www.labelong.com

SUZHOU LABELONG PACKING MACHINERY CO.,LTD.

Add: Shuangqiao road, Leyu Town, Zhangjiagang, Suzhou, China
Tel: +86-512-67236151
Whatsapp: +86-13862027738
E-mail: Sales@Labelong.com
Http: www.labelong.com



苏州利保隆包装机械有限公司

SUZHOU LABELONG PACKING MACHINERY CO.,LTD.

COMPANY PROFILE

公司简介

苏州利保隆包装机械有限公司，位于中国江苏省张家港市，是一个致力于生产软饮料灌装、包装、和水处理设备的专业制造商。也是一个集开发、制造、技术服务以及市场推广于一体的专业制造企业。

利保隆成立于2006年，拥有10000多平方米面积的标准厂房以及60多个专业技术人员。长期秉持“专业创造价值”的理念，在公司成立近10年间，产品远销国内各个省市，也服务于美国、加拿大、加纳、秘鲁、俄罗斯、南非、菲律宾、马来西亚、印度尼西亚、马来西亚等多个国家。为其提供定制化、水处理、前处理、灌装以及包装解决方案。主要针对产品有：纯净水、矿泉水、果汁饮料、碳酸饮料、啤酒、调味品以及化妆品等液体。

利保隆贯彻互联网策略，使得产业更加数字化、信息化以及透明化。目前，主要的互联网渠道是阿里巴巴，中国制造以及公司官网www.labelong.com。公司坚持质量至上，服务至上，凭借优质服务以及全优的售后服务体系，赢得了良好的口碑。

Suzhou Labelong Packaging Machinery Company locates in Zhangjiagang, Jiangsu. It is a professional manufacturer specializing in Soft and hard drinks Filling, Packaging and Water treatment solution. And also a professional manufacturing enterprise that integrates development, manufacturing, technical services and marketing.

Labelong was established in 2006 possessed with an 10000 square meters standard workshop and More than 60 professional workers. Labelong has adhered to our long-term concept of "Profession create extraordinariness". During the 10 years since establishment of our company, our products are sold to domestic provinces and cities, also to many other countries like the United States, Canada, Ghana, Peru, Russia, South Africa, Vietnam, Philippines, Pakistan, Malaysia and so on. We provide with them solutions for blow molding, water treatment, juice processing system, filling and packaging solutions. They are mainly for liquids such as pure water, fruit drinks, carbonated beverages, beer, condiments, cosmetics and so on.

Labelong put "Internet" strategy into deep implementation, making the industry more digitized, informatized and transparent. At present, the main Internet channels are Alibaba, Made in China and company website www.labelong.com. We insist on high quality, service-oriented concepts, with high-quality equipment and excellent after-sales service system, and has won a good reputation.

We Manufactures & Supply

- × Beverage, Water & liquid Filling Solutions
- × Bottle Labeling Solutions
- × Bottle Packing Solutions
- × Water Treatment Solutions

- × Beverage Processing Solutions
- × Bottle Blow Molding Solutions
- × Preforms and Caps Molding Solutions



Contents 目录



01 BOTTLE WATER FILLING LINE

瓶装水生产线



03 CARBONATED SOFT DRINK FILLING LINE

含气饮料生产线



06 JUICE / PULP JUICE FILLING LINE

果汁灌装生产线



07 OIL FILLING LINE

油灌装生产线



08 GLASS BOTTLE JUICE/ WINE FILLING LINE

玻璃瓶果汁/ 酒生产线



09 CAN FILLING LINE

易拉罐生产线



10 5 GALLON BOTTLE WATER FILLING LINE

5加仑桶装水生产线



11 BEVERAGE FILLING LINE AUXILIARY EQUIPMENT

饮料灌装生产线辅助设备



12 DRINKING WATER TREATMENT SOLUTIONS

饮用水处理系统

15 LABELING & POST PACKAGING SOLUTIONS

贴标机及二次包装

24 BOTTLE BLOW MOLDING MACHINE

吹瓶机系列

26 BOTTLE PREFORM INJECTION MOLDING MACHINE

瓶坯注塑机

28 BEVERAGE PROCESSING EQUIPMENT

饮料前处理设备

LABELONG

PACKING YOURS IDEAS

Applicable Production: water, wine, flavor water & other still free liquid.
Packaging Container: Round, Square and Flat PET bottle and other Plastic Bottle
Caps applicable: 26-30mm screw caps and sport caps
Integrated rinsing empty bottles, filling bottles, capping bottles, 3 in 1
Filling Precision: $\pm 3\text{mm}$ liquid level



适用生产：水、酒、风味水及其他液体饮料
包装容器：圆瓶、方瓶、扁瓶的PET瓶和其他塑料瓶
瓶盖适用范围：26-30mm的螺旋盖和运动盖
综合空瓶清洗、灌装、旋盖三合一
灌装精度： $\pm 1-3mm$ 液位

Standard 容重	10-8-4	14-12-5	16-18-5	24-24-8	32-32-8	40-40-10	50-50-12	60-60-15
Capacity (GPH) (公升/分钟)	3,000	5,000	8,000	12,000	15,000	18,000	22,000	24,000
Substrate in Bottle Space 瓶内空间尺寸	Round and Square container		Bottle diameter 50-120mm		Bottle Height 160-320mm			
Drive Motor 电动机	2.02	2.42	3.12	3.92	3.92	5.87	7.87	11.37
Dimension L x W x H 长 x 宽 x 高	2260-1620-2700	2360-1770-2700	2760-2060-2700	2800-2320-2700	3550-2660-2700	4700-3320-2700	5800-4150-2700	7700-5290-2700

*Capacity @ 500ml PET Bottles *产量按装500mlPET瓶

/// 饮用水及不含气液体 5L PET/HDPE瓶 冲瓶、灌装、封口 旋转式三合一灌装机组


Applicable Production: water, wine, flavor water & other still free liquid.
Packaging Container: Round and Square 3~10 L PET and HDPE bottle
Caps applicable: 38~46mm screw caps, sport caps & pressed caps
Integrated rinsing empty bottles, filling bottles, capping bottles, 3 in 1
Filling Precision: ±3mm liquid level



适用生产：水、酒、风味水及其他液体饮料
包装容器：圆瓶、方瓶3-10L的PET瓶和HDPE瓶
瓶盖适用范围：38-45mm的螺旋盖和运动盖/压力盖
综合空瓶清洗、灌装、旋盖三合一
灌装精度：±/3mm 液位

Model 型号	B-6-4	12-12-4	16-16-4	20-20-5	25-25-5
Capacity (BPM) 产能(台/分)	700	1500	2000	3000	3600
Suit for Bottle Shape 适用瓶型	Round and Square container		Bottle diameter:50-120mm Bottle Height: 160-320mm		
Drive Motor 驱动马达	2.2kW	2.9kW	3.7kW	3.7kW	4.12kW
Dimension L*W*H(mm) 长*宽*高	2600*1900*2700	3200*2780*2700	3650*2965*2700	3950*3300*2700	4154*3054*2700

*Capacity @ 5L PET Bottles *产量按5L PET瓶

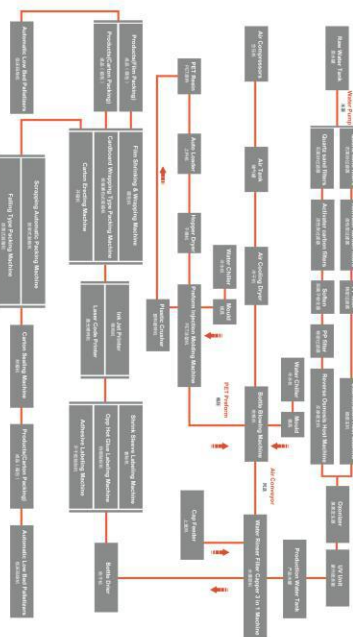Water Filling Plant Flow Chart
水灌装线流程图

Applicable Production: Carbonated soft drink, sparkling water, and oxygen-enriched water
Packaging Container: Round, Square and Flat PET bottle
Caps applicable: 26-30mm screw caps and sport caps
Integrated rinsing empty bottles, filling bottles, capping bottles, 3 in 1
Filling Precision: ±3mm liquid level



适用生产：含气饮料
包装容器：圆瓶、方瓶、扁瓶的PET瓶和其他塑料瓶
瓶盖适用范围：26-30mm的螺旋盖和运动盖
综合空瓶清洗、灌装、旋盖三合一
灌装精度： $\pm 3\text{mm}$ 液位

Round / Flat Cap 圆盖 / 平盖	10-8-4	14-12-5	16-16-5	24-24-8	32-32-8	40-40-10	50-50-12	60-60-15
Capacity (GPM) 容量 (加仑)	1500	3,000	5,000	8,000	12,000	15,000	18,000	20,000
	Round and Square container		Bottle diameter 50-120mm Bottle Height 160-320mm					
Drum Weight 圆桶重量 (kg)	2.02	2.42	3.12	3.92	3.92	6.87	7.87	11.37
Dimension (W*H*P) 尺寸 (宽*高*深)	280*163*270	380*177*270	480*189*270	580*203*270	680*203*270	740*333*270	980*415*270	975*530*376

*Capacity @ 500ml PET Bottles *产量按照500mlPET瓶


Applicable Production: Bottle of milk, Lactate milk, soy milk, Juice etc.
Empty bottles filling and Aluminum Foil Sealing, 2 in 1.



适用生产：瓶装牛奶、乳酸奶、豆奶、果汁等
空瓶灌装和铝箔封口，2合1

Model 型号	FSF 10/10	FSF 20/12	FSF 24/14	FSF 30/30
Capacity 产量	4000	8,500	12,000	18,000
Bottle Size 组合瓶规格	Bottle Diameter: 50-90 mm Bottle Height: 110-180mm			
Power (KW) 功率	2.02	2.42	3.12	3.92
Measurement (mm) 尺寸	1600×1400×2100	1800×1600×2100	1900×1650×2100	2400×2000×2100

*Capacity @ 500ml PET Bottles *产量按照500mlPET瓶

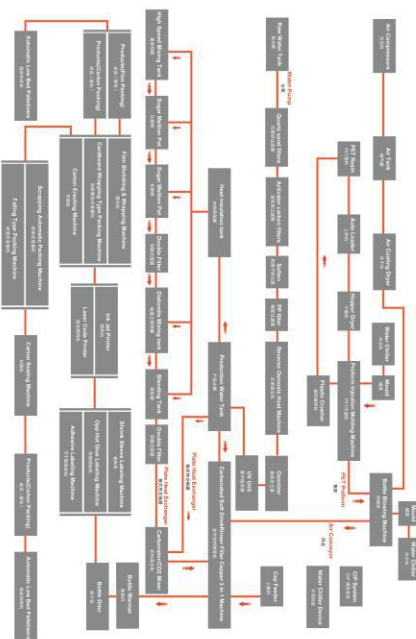

Carbonated Soft Drink Filling Plant Flow Chart
含汽饮料灌装线流程图

TriBloc Rinser Filler Capper (Pet bottle Juice Tea Energy drink & Milk)

旋转式三合一灌装机组 (PET瓶 果汁、茶饮料、功能饮料、牛奶热灌装)

Model: RFC-H Series

Applicable Production: juice, tea, milk, energy drink and other no carbonated beverage
Packaging Container: PET PP and HDPE bottles
Caps applicable: 26-38mm screw caps and sport caps
Integrated rinsing empty bottles, filling bottles, capping bottles, 3 in 1
Filling Precision: ±2mm near full filling.

型号: RFC-H系列

适用生产: 果汁、茶、牛奶、功能饮料, 其他一些含气饮料
包装容器: PET, PP, HDPE瓶
瓶盖适用范围: 26-38mm的螺旋盖和运动盖
综合空瓶清洗、灌装、旋盖三合一
灌装精度: +/-2mm液位



Model 型号	10-8-4	14-12-5	16-16-5	24-24-8	32-32-8	40-40-10	50-50-12	60-60-15
Capacity (BPH) 产量 (瓶/小时)	1800	4,000	8,000	10,000	12,000	15,000	18,000	20,000
Suitable to Bottle Shape 适用瓶子尺寸	Round and Square container Bottle diameter: 50-120mm Bottle Height: 160-320mm							
Drive Motor 电机功率	2.02	2.42	3.12	3.92	3.92	5.87	7.87	11.37
Dimension (L*W*H)mm 尺寸 (长*宽*高) 毫米	2280*1620*2700	2360*1770*2700	2760*2060*2700	2800*2220*2700	3550*2650*2700	4700*3320*2700	5800*4150*2700	6770*5290*2700

*Capacity @500ml PET Bottles *产量按按500mlPET瓶

Juice Washing Pulp Filling Juice Filling Capping 4-IN-1 Monobloc (Small Bottle)

冲瓶、果肉灌装、果汁灌装、封口 四合一机组

Model: RFC-H Series

Applicable Production: pulp juice
Packaging Container: PET/PP and HDPE bottles
Caps applicable: 26-38mm screw caps and sport caps
Integrated rinsing empty bottles, pulp filling, juice filling capping bottles, 4 in 1
Filling Precision: ±2mm liquid level.




Model 型号	14-10-12-5	16-12-16-5	24-16-24-8	32-24-32-8	40-32-40-10
Capacity (BPH) 产量 (瓶/小时)	4,000	6,000	10,000	12,000	15,000
Suitable to Bottle Shape 适用瓶子尺寸	Round and Square container Bottle diameter: 50-120mm Bottle Height: 160-320mm				
Drive Motor 电机功率	2.42	3.12	3.92	3.92	5.87
Dimension (L*W*H)mm 尺寸 (长*宽*高) 毫米	2360*1770*2700	2760*2060*2700	2800*2220*2700	3550*2650*2700	4700*3320*2700

*Capacity @500ml PET Bottles *产量按按500mlPET瓶

RFC-H系列

适用生产: 果肉果汁
包装容器: PET, PP, HDPE瓶
瓶盖适用范围: 26-38mm的螺旋盖和运动盖
综合空瓶清洗、果肉灌装、果汁灌装、旋盖三合一
灌装精度: +/-2mm液位

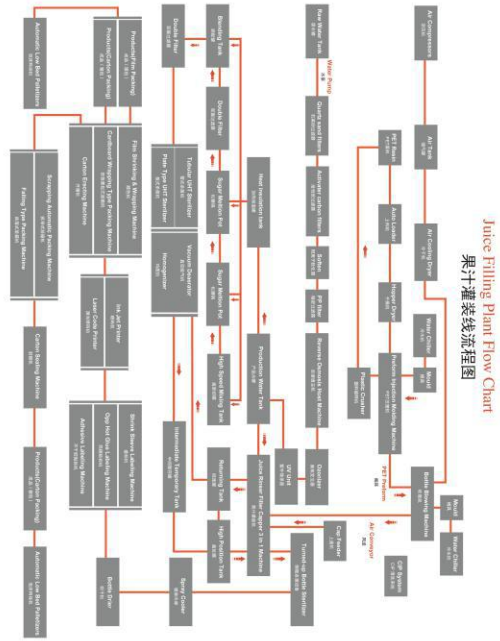

Monobloc Filler Capper for Oil & Viscous Fluid

食用油、粘稠液体灌装、封口机组

GYF Series

Applicable Production: Edible oil, such as: peanut oil, soybean oil, rapeseed oil, salad oil, sesame oil, olive oil, and so on
Packaging container: Round PET and glass bottles and containers.
Labeling material: PET, PVC film in Roller
Speed: 3,000BPH to 24,000BPH
Filling Precision: ±2mm near full filling.

GYF 系列

适用生产: 食用油, 例如花生油, 大豆油, 菜籽油, 色拉油, 芝麻油, 橄榄油及其他
适用容器: 圆形PET和玻璃瓶容器
标签材料: 卷膜PET, PVC
产量: 3000-24000瓶/小时
灌装精度: +/-2mm液位



Plunger Type Filling Machine 柱塞式灌装机				
Model 型号	GYF-12-5Z	GYF-16-5Z	GYF-24-8Z	GYF-32-8Z
Capacity 产量 (瓶/小时)	4,100BPH	5,300BPH	8,250BPH	11,000BPH
Bottle Size 适用瓶型尺寸	Round & Square PET bottle 0.3L-1L bottle			
Power 功率/KW	1.5	2.2	3	3



Gravity Type Filling machine 自流式灌装机						
Model 型号	GYF-12-5F	GYF-16-5F	GYF-24-8F	GYF-32-8F	GYF-12-5F	GYF-20-5F
Capacity 产量 (瓶/小时)	3,000BPH	5,000BPH	7,500BPH	10,000BPH	1,000BPH	1,500BPH
Bottle Size 适用瓶型尺寸	Round & Square PET bottle 0.3L-2.5L bottle, 30mm bottle neck			Round & Square, 3L-6L bottle		
Power 功率/KW	1.5	2.2	3	3	1.5	2.2

Weighting Type Filling Machine 称重式灌装机						
Model 型号	GYF-12-5C	GYF-16-5C	GYF-24-8C	GYF-32-8C	GYF-12-5C	GYF-20-5C
Capacity 产量 (瓶/小时)	3,500BPH	5,500BPH	8,000BPH	11,000BPH	1,200BPH	1,800BPH
Bottle Size 适用瓶型尺寸	Round & Square PET bottle 0.3L-2.5L bottle, 30mm bottle neck			Round & Square PET bottle 3L-6L bottle		
Power 功率/KW	1.5	2.2	3	3	1.5	2.2


TriBloc Rinser Filler Capper (Non-Carbonated / ROPP Cap / CROWN Cap / Pull-off Cap / Twist Off Metal Cap)

水、果汁、功能饮料、牛奶等不含气饮料 冲瓶-灌装-旋盖三合一机组 (铝盖, 皇冠盖, 拉环盖, 三旋盖)

Model: RFC-HR Series

Applicable Production: still water, energy drink, juice and other still free liquid
Packaging Container: Round, Square and Flat glass bottle
Caps applicable: ROPP Aluminum Caps
Integrated rinsing empty bottles washing, filling bottles, capping bottles, 3 in 1
Filling Precision: ±2mm liquid level

型号: RFC-HR系列
适用产品: 水、果汁、功能饮料, 牛奶等其它不含气液体
包装容器: 圆形、方形、扁形玻璃瓶
适用盖子: 铝盖, 皇冠盖, 拉环盖
综合清洗、灌装、旋盖三合一一体机
灌装精度: +/-2mm液位



Model 型号	14-12-5	16-16-5	24-24-8	32-32-8	40-40-10
Capacity (BPH) 产量 (瓶/小时)	4,000	7,000	10,000	12,000	15,000
Suitable to Bottle Shape 适用瓶子尺寸	Round and Square container Bottle diameter: 50-120mm Bottle Height: 160-320mm				
Drive Motor 电机功率	2.42	3.12	3.92	3.92	5.87
Dimension (L*W*H)mm 尺寸 (长*宽*高) 毫米	2430*1770*2700	2800*2060*2700	2950*2230*2700	3700*2650*2700	4850*3320*2700

*Capacity @500ml PET Bottles *产量按按500mlPET瓶

TriBloc Rinser Filler Capper(Carbonated,ROPP Cap,CROWN Cap,Pull-off Cap)

啤酒含气饮料, 冲瓶-灌装-封盖三合一机组 (铝盖, 皇冠盖, 拉环盖)

Model: RFC-CR Series

Applicable Production: Beer/Carbonated soft drink, sparkling water, and oxygen-enriched water
Packaging Container: Round, Square and Flat glass bottle
Caps applicable: ROPP Aluminum Caps
Integrated rinsing empty bottles washing, filling bottles, capping bottles, 3 in 1
Filling Precision: ±2mm liquid level

型号: RFC-CR系列
适用产品: 碳酸饮料, 气泡酒, 富氧水等
包装容器: 圆形、方形、扁形玻璃瓶
适用盖子: 铝盖, 皇冠盖, 拉环盖
综合清洗、灌装、旋盖三合一一体机
灌装精度: +/-2mm液位



Model 型号	14-12-5	16-16-5	24-24-8	32-32-8	40-40-10
Capacity (BPH) 产量 (瓶/小时)	4,000	7,000	10,000	12,000	15,000
Suitable to Bottle Shape 适用瓶子尺寸	Round and Square container Bottle diameter: 50-120mm Bottle Height: 160-320mm				
Drive Motor 电机功率	2.42	3.12	3.92	3.92	5.87
Dimension (L*W*H)mm 尺寸 (长*宽*高) 毫米	2430*1770*2700	2800*2060*2700	2950*2230*2700	3700*2650*2700	4850*3320*2700

*Capacity @500ml PET Bottles *产量按按500mlPET瓶

Monobloc Cans Filler Sealer(For Juice,Milk and Still Drink)

易拉罐含汽旋式二合一灌装机组

Model: CFS-C Series

Applicable Production: carbonated soft drink, beer and sparkling water.
Container: 2 piece aluminum can, and PET cans
Integrated filling cans, sealing cans 2 in 1
Filling Precision: ±3mm liquid level

型号: CFS-C 系列
适用产品: 碳酸饮料, 啤酒, 汽酒等含气饮料
包装容器: 铝罐, PET罐
灌装, 旋盖二合一一体机
灌装精度: ±3mm液位



Model 型号	12-4	16-4	24-4	32
Production capacity 产量	4,000CPH	6,000CPH	8,000CPH	10,000CPH
Can Available 适用尺寸	Ø52.5-98mm H 39-160mm			
Powerful 电机功率	5.5	5.5	7.5	7.5
Dimensions (L*W*H) 尺寸(长*宽*高) 毫米	2750*1450*1900	2750*1750*1900	2750*2150*1900	3150*2150*1900

*Capacity @330ml Cans

*产量按罐330ml易拉罐

Monobloc Cans Filler Sealer(For Juice,Milk and Still Drink)

易拉罐不含汽旋式二合一灌装机组

Model: CFS-S Series

Applicable Production: juice, tea and other non-carbonated beverage
container: three piece metal cans, 2 piece aluminum can, and PET cans
Integrated filling cans, sealing cans 2 in 1
Filling Precision: ±2mm liquid level



Model 型号	12-4	16-4	24-4	32
Production capacity 产量	6,000CPH	8,000CPH	12,000CPH	15,000CPH
Can Available 适用尺寸	Ø52.5-98mm H 39-160mm			
Powerful 电机功率	5.5	5.5	7.5	7.5
Dimensions (L*W*H) 尺寸(长*宽*高) 毫米	2750*1450*1900	2750*1750*1900	2750*2150*1900	3150*2150*1900

*Capacity @330ml Cans

*产量按罐330ml易拉罐

型号: CFS-S 系列
适用产品: 果汁, 茶, 牛奶和其他不含气饮料
包装容器: 三片铁易拉罐, 铝罐, PET罐
灌装, 旋盖二合一一体机
灌装精度: ±2mm液位

5 Gallon Water Filling Machine

5加仑饮用水灌装机

WFC Series

Packaging Container: 3 gallon, 5 gallon bottle, The capacity of this machine is range from 100b/h to 2000b/h Customized service includes automatic cap filler, internal and external barrel scrubber, cap elevator and heat shrinker, etc.

WFC系列

使用范围: 3加仑, 5加仑水桶, 机器的产量为100-2000桶/小时, 可供客户选择。
另可用户需要配置自动旋盖机, 自动旋盖机, 内外桶刷洗机, 自动上盖机, 热收缩机等。



Model 型号	WFC-100	WFC-200	WFC-300	WFC-400	WFC-600	WFC-800	WFC-1200	WFC-1500
Rated production capacity (120h) 额定产量	100	200	300	450	600	900	1200	1500
Installed capacity 装机容量	1.3	1.7	3.8	3.8	7.5	9.7	13.5	16.5
Weight(kg) 重量	680	800	1500	2100	3000	3500	4500	5500

*Capacity @5 gallon bottles

*产量按桶5加仑桶

Carbonator/CO2 Mixer (CO2 Volume ratio 3.6~4.0)

饮料混合机

DYH series drink mixer adopts special mixed gas and liquid ejector and the technique of vacuum decarboxylation. The mixing precision is high and the CO2 is fully mixed. The mixing proportion between water and syrup is seriously controlled by micro metering device. It is equipped with CO2 accuracy pressure control so that the liquid level is always stable. The alarm device for low pressure and low liquid level ensures the quality of its production. The machine obtains advantages of high reliability, high efficiency, high grade of automation and easy operation, etc.

饮料混合机设备采用独特的汽、液混合喷射器和真空脱气技术, 混合精度高, 二氧化碳混合充分, 水与糖液的混合比例由微计装置严格控制, 配有CO2压力控制精确, 液位控制稳定, 设有欠压, 低液位等保护报警装置, 确保出品质量, 该设备具有可靠性高、效率高、操作简便等优点。

Model 型号	DYH-1000	DYH-2000	DYH-3000	DYH-5000	DYH-8000	DYH-10000
Capacity(L/H) 产量 (升/时)	1000	2000	3000	5000	8000	10000
Content of CO2 CO2含量	3.5-4	3.5-4	3.5-4	3.5-4	3.5-4	3.5-4
Mixing temperature 混合温度 (℃)	<4	<4	<4	<4	<4	<4
Power 功率	1.5	2.97	3	5.9	7.2	10.2



Carbonator/CO2 Mixer (CO2 Volume ratio 2.3~2.8)

饮料混合机

QHS series Beverage Mixers are designed to increase the precise proportion of water, syrup and carbon dioxide. It uses advanced foreign technology - static mixer to thin the water layer and increase the carbonization time and also ensure that the effect of mixing drinks. This plant uses carbon dioxide reflux device, not only saves carbon dioxide, but also achieve the purpose of decarboxylation. The perfect automatic control system consists of high-quality water pumps and electrical components. Which has advantages of coordinated action, beautiful appearance, cleaning conveniently and high degree of automation. Applicable to mixing of multiple types of beverage, such as soft drinks, juice drinks, cola and other soft and hard drinks.

饮料混合机是碳源水、糖浆和二氧化碳的比例精确而精心设计制作, 采用国外先进技术-静态混合器来减小水层, 增加碳化时间, 确保饮料混合效果, 采用二氧化碳回流装置, 既节省二氧化碳, 又达到脱氧的目的, 优质的水泵和电器等组成完善的自动控制系统, 具有动作协调, 外形美观, 清洗便利, 自动化程度高等优点, 适用于多种类型饮料的混合, 如汽水、果汁饮料、可乐等碳酸饮料。

Model 型号	QHS-1000	QHS-2000	QHS-3000	QHS-4000	QHS-5000
Capacity(L/H) 产量 (升/时)	1000	2000	3000	4000	5000
Content of CO2 CO2含量	2-2.5	2-2.5	2-2.5	2-2.5	2-2.5
Mixing temperature 混合温度 (℃)	<4	<4	<4	<4	<4
Power 功率	1.5	2.97	3	5.9	7.2



Tubular UHT Sterilizer

管式杀菌机

This equipment has become more popular in many countries for wide range and accurate control of sterilizing temperature. It's very suited for the liquid product with fiber and particulates (fruit beverage, vegetable beverage) and especially for the high viscosity products (fruit paste, juice with pulp, pudding, sauces, gravy), also for low-acid beverage and neutral beverage (peanut milk, yogurt and tea).

该设备因为其使用多样性和杀菌温度准确控制的特点, 目前在多个国家深受欢迎, 非常適合含有纤维和颗粒 (如果汁, 蔬菜汁) 的液体产品, 同时也适用于高粘度产品 (如果酱, 果泥, 布丁, 调味酱), 对于低酸度和中性饮料也适用 (如花生奶, 酸奶和茶)。



Model 型号	LHT-1(T)	LHT-2(T)	LHT-3(T)	LHT-4(T)	LHT-5(T)
Production capacity (1h) 生产能力	1	2	3	4	5
Working temperature 杀菌温度	95-125 (138℃)				
Dimensions 外形尺寸	3500*1800*1800	4500*2000*1900	4500*2500*2000	6000*2500*2000	9000*2500*2000
Power 功率	6.75	12	18	21	25

Plate Type UHT Sterilizer

板式杀菌机

Production function

High heat recovery, stable temperature control (PLC control, touch screen display) The system adopts ultra-high temperature processing method, which can strictly sterilize the dairy, tea beverage and fruit etc. and then transfer to aseptic packaging. The sterilizing temperature is 135-140℃ and the heat preservation period is 4-5 seconds, so as to maintain the original nutrition, color and flavor of beverage and dairy.

特点:

热能回收利用, 稳定的温度控制 (PLC控制, 触摸屏显示), 系统采用超高温处理法, 它可以严格杀菌奶, 茶饮料和果汁等, 然后进行无菌灌装, 杀菌温度135-140℃, 保温时间是4-5秒, 以保持风味饮料原有的营养、颜色和味道。

Model 型号	LHT-1	LHT-2	LHT-3	LHT-4	LHT-5
Production capacity (1h) 生产能力	1	2	3	4	5
Working temperature 杀菌温度	137	137	137	137	137
Dimensions 外形尺寸	980	1080	1160	1350	1680
Power 功率	1500/1800/2000	1800/1800/2200	2100/2200/2500	2300/2200/2500	2600/2200/2500



Turned-up Bottle Sterilizer

倒瓶杀菌设备

This kind of sterilizer is that the angle of bottle overturns to 90° or 110° in the processing of transporting bottle, and then the beverage use its high temperature higher than 80°C after filling to give the caps final sterilization. The sterilization time can be adjusted in the scope of 30-40sec, as the requirement. Adopting impacted stainless steel chain and enduring high temperature plastic chain board. With the excellent features of compact structure, easy operation and saving energy, this kind of machine is the best choice for tea, fruit juice hot filling cap sterilizing equipment. capacity: 2,000bph-24,000bph

倒瓶杀菌机是在运输过程中翻转到90度或者110度，利用高温灌装后饮料自身温度（大于80℃）对瓶盖部位进行最终的高温杀菌，杀菌时间可根据要求在30-40秒不等，采用进口的不锈钢链条及耐高温塑料链板。本机结构简单，操作方便，节约能源，是茶饮料、果汁热灌装理想的瓶子杀菌设备。
产量：2000-24000瓶/小时



Spray Cooler&Bottle Warmer

喷淋冷却及温瓶机

This machine use for carbonated drink, juice, beverage production line. make the temperature of hot filling drink from 85 °C down to 35 °C-40 °C or the cold filling drink up to 30 °C. Its working process can be divided into 3 stages, circulating hot water spray, warm water pre-cooling, cold water cooling. It is suitable for cooling all kinds of bottle and canned juice and carbonated beverage. The main body made of excellent stainless steel running reliable and in a beautiful appearance. Capacity: 2,000bph-24,000bph


此机器适用于全气饮料、果汁、茶饮料生产中，使热灌装的温度从85℃降到35℃或冷灌装的温度上升到30℃。它的工作流程可以划分为三个阶段：循环热水喷淋、温水预冷却、冷水冷却。它适用于各种瓶子和带盖罐装的果汁和全气饮料。主要结构是优质不锈钢，运行平稳，外观美观。
产量：2000-24000瓶/小时



Hollow Fiber Ultra Filtration System For Mineral Water

中空超滤水处理系统

Hollow fiber ultra filtration system is a film separation technology used to separate, condense, and distill the macromolecule. Ultra filter separation undertakes in the normal temperature and low pressure, without state change. It's of simple structure, easy operation, wide usage, and strong general capacity. Condensing ultra filter is widely used in the industries like food, ferment, medicine, environment, and chemicals.

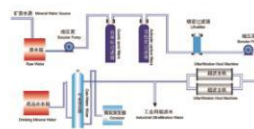

中空纤维超滤膜是广泛用于大分子物质的分离、浓缩和提纯的一种膜分离技术。超滤分离在常温、低压下运行，无相态变化，结构简单，操作方便，应用广泛，通量较高。超滤膜超滤在食品、发酵、医药、环保、化工等行业广泛适用。




Reverse Osmosis Purification System for Pure Water

反渗透水处理系统

This system adopts stainless steel sand filter, active carbon filter, effectively to remove big impure particles and suspending matters, improve RO membrane water inputting index, effectively remove the smell and rest chlorine of the original water and improve the taste of water quality. The main machine adopts American high effective low-pressure compound film, with single film salt removing degree up to 99%, medicine, environment, and chemicals.

本系统处理采用不锈钢多介质过滤，活性炭处理，有效去除大颗粒杂质和悬浮物，提高和膜进水指数，并有效去除了原水的异味、余氯，提高了水质的口感。主机采用了美国高效低压复合膜，单支脱盐率99%。



Rotary Type Hot Glue OPP Labeling Machine(Round, Square, Flat, Oval bottles)

旋转式热熔胶贴标机（圆瓶、方瓶、扁瓶、椭圆瓶）

Applicable Container: Round, Square, Flat, Oval PET and glass bottles and containers.
Labeling material: OPP, BOPP, PE, PP and Paper film in roller.
Hot glue applicator speed: 6,000BPH to 24,000BPH

适用瓶型：圆瓶、方瓶、扁瓶、椭圆瓶等PET和玻璃瓶或容器
标签材料：OPP, BOPP, PE, PP, 纸膜
热熔胶贴标机速度：6,000BPH-24,000BPH



型号	RFL-R100	RFL-R130	RFL-R200	RFL-R250	RFL-R300	RFL-R400
适用瓶型	6,000	8,000	12,000	15,000	18,000	24,000
适用瓶径	8	12	12	16	20	30
适用瓶高	Diameter 30-120 Bottle height 70-340					
适用瓶宽	Max 600mm with 3 inch or 6 inch diameter paper core					
适用瓶重	±0.2mm					
适用瓶重	6.5KW	8KW	8KW	8KW	8KW	8KW
适用瓶重	3000-1800-2000	3000-1800-2000	3000-2000-2200	3000-2000-2200	3000-2200-2500	3000-2200-2500



方瓶、扁瓶、椭圆瓶

Roll Fed Labeling Machine (Linear Type)(Hot Glue)

直线式热熔胶贴标机

Applicable Container: round PET and glass bottles, round cans and other round container.
Labeling material: OPP, BOPP, PE, PP and Paper film in Roller.
Hot glue applicator speed: 6,000BPH to 36,000BPH

适用瓶型：圆瓶、玻璃瓶、圆罐
标签材料：OPP, BOPP, PE, PP, 纸膜
热熔胶贴标机速度：6,000BPH-36,000BPH

型号	RFL-L100	RFL-L150	RFL-L200	RFL-L250
适用瓶型	6,000	9,000	12,000	15,000
适用瓶径	Diameter 30-120 Bottle height 70-340			
适用瓶高	±0.2mm			
适用瓶重	Max 600mm with 3 inch or 6 inch diameter paper core			
适用瓶重	8KW	8KW	11KW	11KW
适用瓶重	3000-1800-1800	3000-1800-1800	3000-1800-2100	3000-1800-2100



Single Head Shrink Sleeve Labeling Machine

单头套标机

Applicable Container: Round, square PET and glass bottles and containers.
Label material: PET/PVC Shrinkable film in roller.
Speed: 3000BPH-24000BPH

适用瓶型：圆瓶、方形的PET、玻璃瓶
标签材料：PET、PVC卷标可收缩材料
产量：3000BPH-24000BPH



Model	SL-50	SL-100	SL-150	SL-200	SL-300	SL-400
Capacity (BPH)	3,000	6,000	9,000	15,000	21,000	24,000
产量 (瓶/小时)	28mm-120mm					
Container Diameter	30mm-250mm					
Label Thickness	0.03mm-0.13mm					
Dimensions (mm)	600*750*1800	2440*950*2100	2440*950*2100	2440*1000*2200	2440*1000*2200	2440*1000*2200
机座尺寸	100	450	550	600	700	750
Weight (kg)						

Double Head Shrink Sleeve Labeling Machine

双头套标机

Applicable Container: Round, square PET and glass bottle containers. Bottle neck and body labeling in the same machine.
Label material: PET/PVC film in roller.
Speed: 6000BPH-12000BPH

适用瓶型：圆瓶、方形的PET、玻璃瓶。
瓶口和瓶身的套标可以在同一台机完成。
标签材料：PET、PVC卷标可收缩材料
产量：3000BPH-12000BPH



Model	SL-50	SL-100	SL-150
Capacity (BPH)	3,000	6,000	9,000
产量 (瓶/小时)	28mm-120mm		
Container Diameter	30mm-250mm		
Label Thickness	0.03mm-0.13mm		
Dimensions (mm)	600*750*1800	2440*950*2100	2440*950*2100
机座尺寸	100	450	550
Weight (kg)			



5 Gallon Bottle Mouth Shrink Sleeve Labeling Machine

五加仑瓶口套标机

F5L Series

Applicable Container: 5 Gallon Bottle 5-10L bottle
Labeling material: PET, PVC film in roller
Speed: 3000BPH

Model 型号	SL-50
Capacity (BPH) 产量 (瓶/小时)	3,000
Container Diameter 容器直径	28mm-120mm
Length of Label 标签长度	30mm-250mm
Label Thickness 标签厚度	0.03mm-0.13mm
Dimension(mm) 机器尺寸	600*750*1800
Weight(kg) 机器重量	100

B5L Series

适用范围: 5加仑瓶, 5-10L瓶的瓶口套标
瓶口和瓶身的套标可以在同一台机器完成。
标签材料: PET, PVC卷标可收缩材料
产量: 3000BPH



Double Side Self-Adhesive Labeling Machine

双面不干胶贴标机

ALD Series

Applicable Container: Square PET bottles, round PET Bottle and glass bottles.
Label material: Paper, PC, PET, PVC, PP
Adhesive applicator speed 5,000BPH to 12000BPH

ALD Series

适用范围: PET方瓶/圆瓶以及玻璃瓶。
标签材料: 纸, PC, PET, PVC, PP
产量: 5000BPH-12000BPH



Model 型号	ALD-100	ALD-150	ALD-200
Capacity (BPH) 产量 (瓶/小时)	5000bph	9000bph	12000bph
Length of Label 标签长度	180mm		
Label Width 标签宽度	10-160mm		
Power 功率	2KW	2KW	2KW
Dimension(mm) 机器尺寸	3048*1700*1500	3048*1700*1500	3048*1700*1500

Single Side Self-Adhesive Labeling Machine

单面不干胶贴标机

ALS Series

Applicable Container: Square, round PET and glass bottles and containers.
Label material: Paper, PC, PET, PVC, PP
Adhesive applicator speed 5000BPH to 12000BPH

ALS Series

适用范围: 方瓶, 圆瓶的PET瓶和玻璃瓶。
标签材料: 纸, PC, PET, PVC, PP
产量: 5000BPH-12000BPH

Model 型号	ALS-100	ALS-150	ALS-200
Capacity (BPH) 产量 (瓶/小时)	5000	9000	12000
Length of Label 标签长度	10-300mm		
Label Width 标签宽度	10-160mm		
Power 功率	2KW	2KW	2KW
Dimension(mm) 机器尺寸	3048*1200*1500	3048*1200*1500	3048*1200*1500



Three Label Labeling Machine

三标不干胶贴标机

ALT Series

Applicable Container: Square PET bottles, round PET Bottle and glass bottles.
Label material: Paper, PC, PET, PVC, PP
Adhesive applicator speed 5,000BPH to 12000BPH
Applicable Bottle Type: 3 Pos Adhesive Labels

ALT Series

适用范围: PET方瓶/圆瓶以及玻璃瓶。
标签材料: 纸, PC, PET, PVC, PP
产量: 5000BPH-12000BPH
适合三标的瓶子

Model 型号	ALT-50	ALT-100
Capacity (BPH) 产量 (瓶/小时)	3000bph	6000bph
Label Size (mm) 标签最大宽度 (mm)	Neck Label 125mm Front back label 195mm	Neck Label 125mm Front back label 195mm
Power 功率	2KW	2KW
Dimension(mm) 机器尺寸	3048*1700*1500	3048*1700*1500



Ink-Jet Printer Machine

喷码机

IC-55 Series

Applicable product: Food, beverage, tobacco, electronics, PCB board, building materials, medicine, glass, plastic, automobile parts, etc.
Suitable ink: Pigmented white, pigmented yellow, pigmented blue



IC-55 Series

适用产品: 食品, 饮料, 烟草, 电子产品, 电路板, 建材, 医药, 玻璃产品, 塑料制品, 汽车零部件等
适用油墨: 白色, 黄色, 蓝色

Model 型号	IC-55
Capacity 速度	147mm/min
Language 语言	Chinese/English
Power 功率	120w
Letter Height 字符高度	2-10mm
Nozzle Size 喷嘴尺寸	Φ35mm/280mm

Laser Code Printer

激光喷码机

LS Series

Applicable product: Food, beverage, cosmetics, etc.
Applicable materials can be in a variety of substrate surface, packing materials such as paper, labels, plastic and glass.
Laser type: air cooling the electrode generating a laser CO2
Display: Type/ Ultra imaging LCD, 4 lines

LS Series

适用产品: 食品, 饮料, 烟草, 电子产品, 电路板, 建材, 医药, 玻璃产品, 塑料制品, 汽车零部件等
适用材料: 可以在多种材料表面, 包装材料如纸, 标签, 塑料和玻璃
激光类型: 空气冷却, 电极生成CO2激光
显示类型: 超成像液晶, 4行



PE Film Shrink-Wrapping Packing Machine

热收缩膜包装机

Introduction of Production

Automatic bottle shrink wrapping machine is suitable for wrapping of such products as cans, beverage bottles, the bottled or canned beverage after filling, labeling, will be sent to the heat shrink wrapping machine, and the machine will adjust the packing speed automatically, it is widely used in beverage production line.

设备简介

全自动热收缩包装机适用于易拉罐以及饮料瓶的包装, 易拉罐以及饮料瓶灌装以后以及贴标之后, 将进入热收缩膜的环节, 机器可以自动调节速度, 配产三速于饮料生产线的设备。



WSP Series

Applicable container: Square, round PET bottle and glass bottle, Can
Packing material: PE film in roller
Packing arrangement: 2"3, 3"4, 4"6 (according to bottle type)

WSP Series

适用容器: 方瓶, PET圆瓶, 玻璃瓶, 易拉罐等
包装材料: PE卷膜
包装组合: 2*3, 3*4, 4*6 (根据瓶型)



Main Technical Specifications/主要技术参数

Model 型号	WSP-10L (type)	WSP-20L (type)	WSP-30L (type)
Machine Dimension(mm) 机器尺寸	L6500*2200*2100	L11320*1100*2100	L13840*1100*2100
Shrink Tunnel Dimension(mm) 收缩炉尺寸	L1800*W650*H450	L1800*W650*H450	L2500*W700*H450
Max Package Dimension(mm) 包装最大尺寸	L600*W400*H350	L600*W400*H350	L600*W400*H350
Packing Speed (bottles/min) 包装速度 (瓶/分)	5-10 (pcs/min)	16-20 (pcs/min)	20-30 (pcs/min)
Work Voltage/Power 电压/功率	380V 19KW	380V 30KW	380V 19KW
Working pressure 工作压力	0.6-0.8Mpa	0.6-0.8Mpa	0.6-0.8Mpa
Total Weight 重量	1600KG	2500KG	2800KG

Carton Erecting Machine 开箱机

ACE Series
Applicable area: Food, pharmaceutical, beverage, tobacco, chemical electronic etc.
Capacity: 8-18 cartons/min

适用范围:
食品、医药、饮料、烟草、化学品、电子产品等
速度: 8-18箱/分钟



Model/型号	ACE-12	ACE-18
Carton size/纸箱尺寸	L250-500 W150-400 H100-450mm	
Tape size/胶带尺寸	W48-60.75mm	
Air source/用气量	6-7kg/cm ³	
Dimension/尺寸	1700*1930*1500mm	2000*1930*1500mm
Speed/速度	8-12 cartons/min	15-18 cartons/min
Weight/重量	400kg	400kg

Falling Type Packing Machine 跌落式装箱机

Description of equipment

Automatic loading made machine in combination with foreign advanced technology according to the packing requirements can automatically aligning product finishing novel design compact structure applicable type products such as PET bottles, cans this machine is widely used in beverage, food, daily chemical and other industries.



Main Technical Specifications/主要技术参数

Model/型号	RSCA-630
Power/功率	3.5KW
Speed/速度	10-14 cartons/min
Air pressure/气压	0.5-0.7Mpa
Dimension/尺寸	1300*2000*2100mm
Weight/重量	800KG

设备概述

自动装箱机结合国外先进技术，根据装箱要求，能自动将产品整理排列，设计新颖，结构紧凑，适用PET瓶、易拉罐等类型产品，此机广泛应用于饮料、食品、日化等行业。

Scrapping Automatic Packing Machine 抓举式装箱机

Description of equipment

The machine through the packing of the product structure design grapping fixture according to the actual characteristics of the product to adjust product structure to achieve product automatic packing, customization degree high, widely used in food, medicine, daily chemical, chemical industry etc.



设备概述

本机通过包装产品结构设计抓头夹具，按照产品的实际特点，来适应产品的结构，以达到产品的自动装箱目的，定制化程度比较高，在食品、药品、日化、化工等行业应用广泛。

Main Technical Specifications/主要技术参数

Model/型号	BLA-12	BLA-20
Power/功率	5KW	5KW
Speed/速度	12 cartons/min	20 cartons/min
Air pressure/气压	0.5-0.7Mpa	0.5-0.7Mpa
Dimension/尺寸	2650*2000*2400mm	2850*2000*2400mm
Weight/重量	600KG	800KG

Carton Sealing machine 封箱机

Function: Carton box sealing, can finish top and bottom sealing
Capacity: 8-20 cartons/min

功能: 箱子上下封箱
产量: 8-20箱/分钟

Model/型号	SLA-12	SLA-20
Carton size/纸箱尺寸	L250-500 W150-400 H100-450mm	
Tape size/胶带尺寸	W48-60.75mm	
Table size/台面尺寸	500-750mm	
Air source/用气量	5-6kg/cm ³	



Automatic Low Bed Palletizers 低床码垛机

Working principle

According to the pallet size and product form and high layer pattern to design the corresponding mechanical structure and PLC program automatically finish each layer of product arrangement pattern, in order to ensure the pattern neat and smooth, the arrangement of each layer of the product will be different, because stack up from low to high layer, it called low bed palletizer



Applicable pallet product
carton, PE film shrink packing products, drum shape products, plastic box, bags, and all kinds of regular shape or packaging products.

工作原理

根据栈板尺寸及产品码放形式，层高等，设计相应的机械结构及PLC程序，自动完成每层产品的排列码放，为确保码放的整齐和平稳，每层产品的排列方式会有不同，由低到高一层一层往上码放，故名低床码垛。

常用码垛产品

纸箱、膜包产品、大桶形产品、塑料框、编织袋等各类有规则外形或规则包装的产品。

主要技术参数 Technical Parameter	
Max capacity 每小时码垛量	40 cartons/minute
Max unit weight 单位重量	250kg
Max unit length 单位长度	1800mm
Transportation size 运输规格尺寸	1150mm*1100mm
Power 额定功率	220V/380V 50/60Hz
Operational air pressure 使用气压	0.5-0.7Mpa
Electric control system 电气控制系统	13kw

PET bottle blowing machine 吹瓶机

BL Series

Feature of machine:
1. Simplified operated by HMI control panel
2. Applications All kinds of small PET bottles
3. Modular design facilitates maintenance
4. Core clamping structure close and open mold more easily
5. Blast air heating and cooling more uniform structure type even
6. Machine is very safety stabilization and no waste

BL系列

适用范围: 各种PET瓶

设备特点:
1. 采用人机界面控制, 操作简单方便;
2. 模块化设计, 换模及维修容易;
3. 采用面模合模增压机构, 合模更容易;
4. 采用热风式及散热型增压结构, 发热更均匀;
5. 机器安全稳定性高。



成型腔结构 Clamping System	型号 Model	单位 Unit	BL-2000 (Standard)	BL-4000-L	BL-4000L	BL-8000
	模穴数 (Number of cavity)	cavities	2	4	6	8
	锁模力 (clamping unit)	KG	20000	48000	65000	9800
	单理论产能 (theoretical output)	B.P.H	2200	4000	6000	7500
	主机尺寸 (L*W*H) (machine dimension)	M	2.6*1.8*1.8	3.8*2.5*2.0	5.6*2.2*1.8	6.2*2.2*2.0
机器重量 Machine	机身重量	KG	3500	4300	6000	7000

>>> 5L/20L Full automatic PET bottle blowing machine

5L/20L全自动PET瓶吹瓶机

SMB Series

Applications: 5L-20L PET bottles

Feature of machine:

1. Use sensor M54444 cost iron of damping unit and moving system
2. Use PID constant control heating unit of the wind motor
3. Touch screen human-machine interface for easy operation
4. Modular component design for easily maintenance
5. Use module type of the high pressure blowing valve combine with air recycling system, saving energy and protecting the environment



适用范围:

5L-20L PET瓶

机器特点:

1. 采用米次铁, 高倍磁铁的开关磁结构
2. 采用PID恒定控制加热风和风机电阻
3. 触摸屏人机界面, 操作方便
4. 模块化设计装置
5. 采用配合全制动的风压组合阀, 可有气体回收装置, 减少能源消耗, 保护环境

型号Model	单位Unit	BL-5L	BL-10L	BL-20L
模穴数 Cavities	cavities	2	2	1
锁模力 Clamping force	KG	20000	48000	56000
吹瓶速率 Bottle output	BPH	12000	800	600
主机尺寸 (长x宽x高) (Main size (LxWxH))	M	3.5x2.5x2.0	4.8x2.5x2.0	5.6x2.5x2.2
整机重量 Machine weight	KG	5500	6500	10000

>>> Semi Auto Bottle Blowing Moulding Machine

半自动吹瓶机

This series machine is the latest high output semi-automatic PET blow moulding machine. It can hold the cavity of the blowing mold up to 4 cavities, the output reaches 1800BPH for 500ml water bottles. Compared with the output of normal manual blow moulding machine, this is an outstanding improvement in the PET Bottle blow moulding industry.

此系列吹瓶机是最新的高速半自动吹瓶机(半自动吹瓶机)。它可容纳吹瓶模具最多4个模穴, 产量可达1800BPH, 500ml的水瓶。与正常的手动吹瓶机相比, 具有明显的优势。



型号Model	单位Unit	SMB-4
模穴数 Cavities	cavities	4
锁模力 Clamping force	KG	300
吹瓶速率 Bottle output	BPH	1800
主机尺寸 (长x宽x高) (Main size (LxWxH))	M	1.5x0.88x1.8
整机重量 Machine weight	KG	1300

>>> Bottle Preform Injection Molding Machine

瓶胚注塑机

Production function

Superior shot weight can meet the large shot weight requirements of the preform, increased plasticizing capacity wonderful plasticization, preform color more uniform, production more stable, increased ejection force fit for ejection multi cavity preform, Double-loop system can be for option, it could achieve the synchronous action to improve the production efficiency. Post-mold cooling (PMCC) is available, production capacity can be highly improved (maximum can be 35%).

产品特点:

超大的注射量, 符合瓶胚大注射量的需求, 塑化能力加大, 塑化效果优秀, 瓶胚颜色更均匀, 成型更稳定, 顶出力加大, 适应多腔胚注射, 可选项双回路系统, 实现同步动作, 大幅度提高生产效率, 可配置模外冷却系统, 大幅度提高产能(最高可达35%)



Inject unit 注射装置

Hydraulic Unit 液压装置



Electric Unit 电力装置

Mechanical Unit 机械装置

PET SERIES PET INJECTION MACHINE					
Part	Description	Unit	PET1700-800	PET2100-1300	PET2600-2400
Rated production capacity (100h)	Screw diameter/ 螺杆直径	mm	55	60	70
Installed capacity 装机容量	Screw L/D 螺杆长径比	L/D	25	25	30.3
Weight (kg) 重量	Theoretical shot volume/ 理论注射容积	cm ³	570	763	1431
Rated production capacity (100h)	Shot weight/ 注射重量	g (PET)	615	824	2100
Installed capacity 装机容量	Plasticizing Capacity/ 塑化能力	g/h	28.6	30.3	54.5
Weight (kg) 重量	Injection pressure/ 注射压力	Bar	1388	1431	1564
Rated production capacity (100h)	Clamping force/ 锁模力	kN	1700	2100	2600
Installed capacity 装机容量	Opening stroke/ 开模行程	mm	435	475	500
Weight (kg) 重量	Space between two bars/ 两杆间距	mm	470*470	520*520	580*580
Rated production capacity (100h)	Max. mold height/ 最大模厚	mm	520	530	580
Installed capacity 装机容量	Min. mold height/ 最小模厚	mm	180	200	200
Weight (kg) 重量	Ejection stroke/ 顶出行程	mm	135	140	150
Rated production capacity (100h)	Ejection force/ 顶出力	kN	46	62	62
Installed capacity 装机容量	Pump motor capacity/ 电机功率	kW	29.3	36.7	36.7
Weight (kg) 重量	Pump volume/ 油泵排量	ml/h	64	80	100
Rated production capacity (100h)	Hydraulic motor volume/ 液压马达排量	ml/r	900	1200	1600
Installed capacity 装机容量	Screw speed/ 螺杆转速	r/min	156	145	137.5



>>> Beverage Processing Equipment

饮料前处理设备

Fruit Juice Processing Equipment 果汁前处理设备	Carbonated Beverage Processing Equipment 充气饮料前处理设备
 SUGAR MELTING POT 化糖锅	 HIGH PRESSURE HOMOGENIZATION MACHINE 高压均质机
 SYRUP FILTER 糖浆过滤器	 VACUUM DEAERATOR 真空脱气机
 BLENDING TANK 调配罐	 AUTOMATIC CIP SYSTEM 自动CIP清洗系统
 BEVERAGE STORAGE TANK 储料罐	 CO2 FILTER 二氧化碳过滤器
 DOUBLE FILTER 双联过滤器	 WATER CHILLER DEVICE 冷冻机